

DYNAPRO Model VSP

Vertical Slurry Pumps



Standard Features:

- DYNAPRO vertical pumps are recognized worldwide for their heavy duty construction, long service life, ease of maintenance and overall dependability.
- Available in ASTM A532 Class III Type A High Chrome. High chrome impellers are standard rather than cast iron impellers.
- Available with natural rubber impellers and liners.
- Acid-Proof Models feature elastomer lined and covered parts for all exposed metals below the mounting plate.
- Precision pressure molded and bonded to steel skeletons, the casing liners and impellers provide high efficiencies.
- Cantilevered shaft design eliminates submerged bearings. Shafts are machined C-1045 steel with an elastomer covering for corrosion resistance.
- Double suction impeller prevents air-locking.
- Standard urethane heavy duty rubber strainers.
- Rubber, high chrome or stainless augers standard for sump agitation.

Optional Features:


- Neoprene, urethane and hypalon liners and impellers.
- Available in stainless or alloy steels.
- V belt driven or direct coupled.

Capacities	up to 4000 GPM
Head	up to 155 feet
Solid sizes	325 Mesh to 2 1/8"
Sizes	1.5" to 8"
Impeller Type	Open




Dynapro Equipment Limited

Slurry Pumps for Every Application

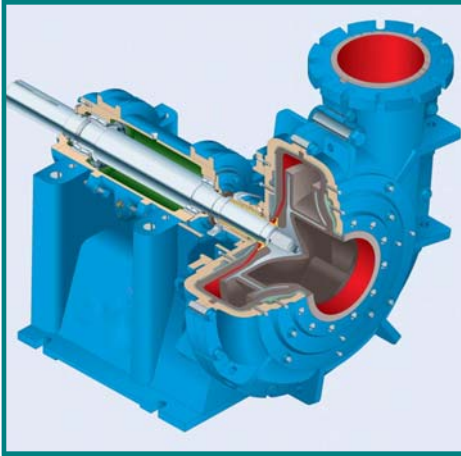

Dynapro Model AC-SRL & D-SRL

- Available sizes from 2x2 through 16x14
- Natural rubber, urethane, neoprene and hypalon liners and impellers
- High chrome impellers and casings
- High pressure casings
- Parts immediately available

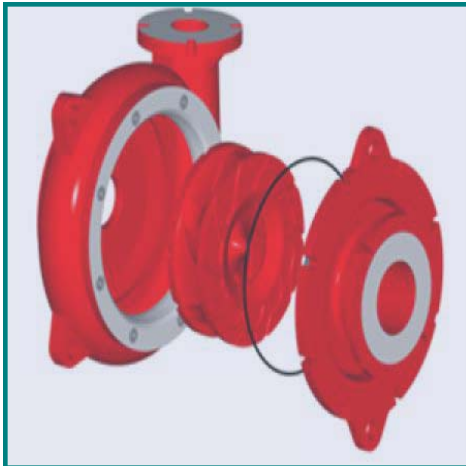

Townley Model WRK

- Available sizes from 6x4 through 26x22
- Created primarily to upgrade existing GIW and Warman slurry pumps
- Considered the greatest advancement in slurry pumping in the last decade
- Cast from high performance alloys and application specific materials

Dynapro Equipment Limited

10 - 598 Falconbridge Road,

Sudbury, Ontario

P3A 5K6

705-524-6958 FAX: 705-524-9122

sales@dynaproequipment.com

www.dynaproequipment.com